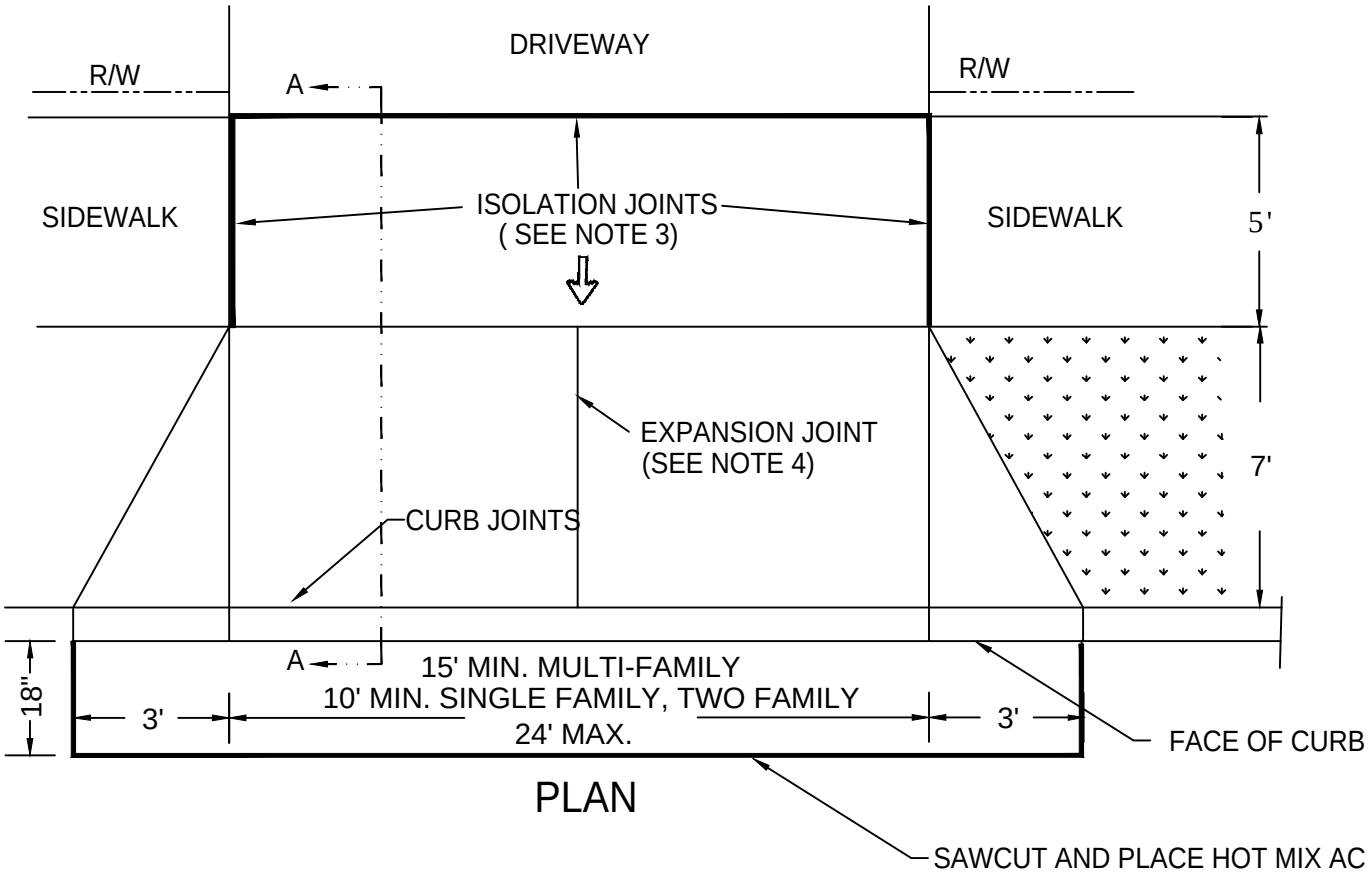

PLAN

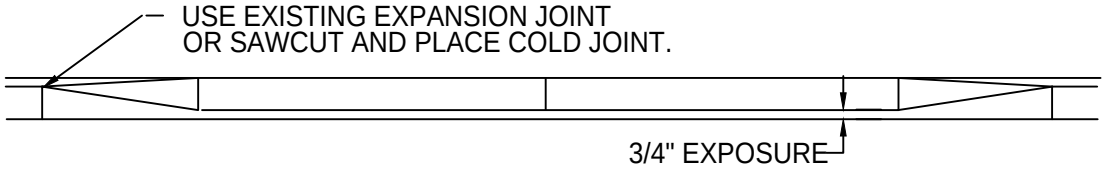

ELEVATION

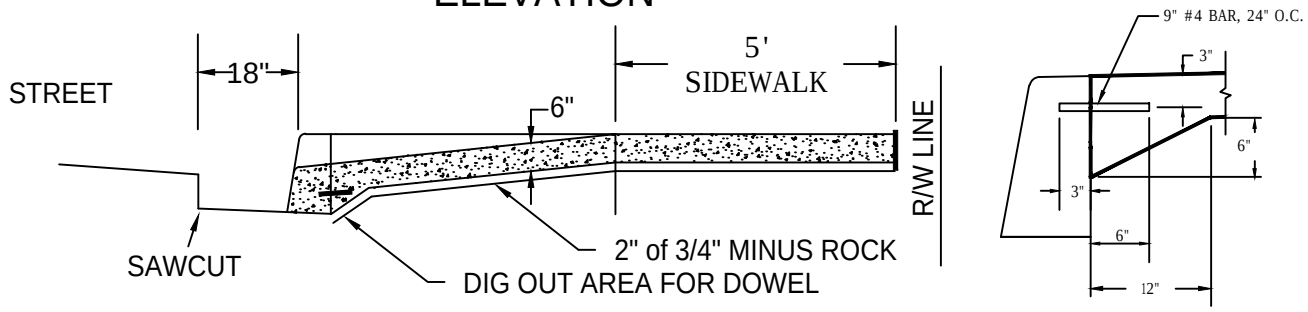

SECTION A-A

NOTES:

1. CONCRETE TO HAVE STRENGTH OF 3000 P.S.I. IN 28 DAYS.
2. CURB JOINT SHALL BE A TROWELED JOINT WITH A MINIMUM 1/2" RADIUS ALONG BACK OF CURB.
3. ISOLATION JOINTS SHALL BE 1/2" PREMOLDED ASPHALT IMPREGNATED MATERIAL EXTENDING FROM SUBGRADE TO FINISHED GRADE, NO WOOD PRODUCTS ALLOWED.
4. EXPANSION JOINT SPACING SHALL BE A MAXIMUM OF 12'.
5. SUB GRADE SHALL BE FIRM WITH NO SOFT SPOTS WITH A MINIMUM OF 2" OF 3/4-0" ROCK.
6. STEEL TIES 9" LONG DRILL HOLE 3" INTO EXISTING CURB 4# BAR 24" ON CENTER.

LEGEND:

⇩ CROSS SLOPE 1.5% MAX (MAX 2.0 % FINISHED SURFACE SLOPE)

FOREST GROVE OREGON	RESIDENTIAL DRIVEWAY WITH STREET SAW CUT	ENGINEERING DEPARTMENT 1924 COUNCIL STREET P.O. BOX 326 FOREST GROVE, OR 97116	DRAWING NO. 102
			SCALE NONE
	\\w2k\eng\Eng Dept\STANDARD DETAILS\100s SIDEWALKS\RESIDENTIAL DRIVEWAY W SAW CUT.dwg		LAST REV. 7/20/22