


3/8" GALV. SQ HD
MACHINE BOLTS W/ WASHERS

A MINIMUM OF 2X2 INCH X 6 FOOT
GALVANIZED "UNISTRUT TELESAR" OR
12 GAGE PROFORATED POSTS OR APPROVED EQUAL

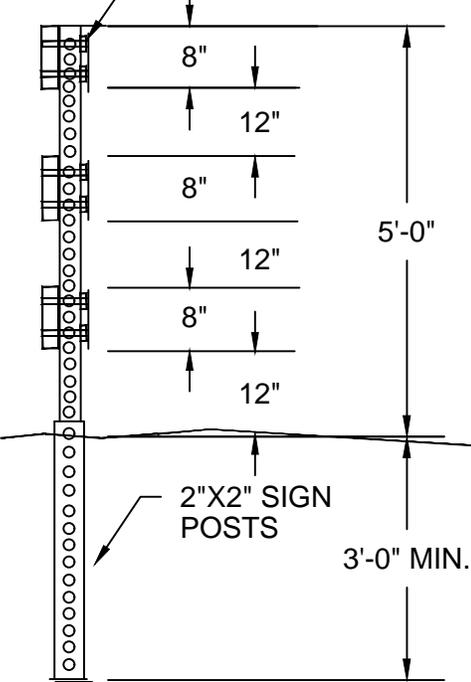

NOTES:

1. METALLIC FACED RAILS TO BE PAINTED RED WITH WHITE REFLECTORIZED STRIPES
ALL WOOD SUPPORTS SHALL BE PAINTED WHITE.
*FOR WIDER APPLICATIONS, MULTIPLE SECTIONS AS SHOWN SHALL BE USED.
2. DIRECTION OF CHEVRONS MAY VARY
LEFT STRIPES FOR RIGHT PASSING.
RIGHT STRIPES FOR LEFT PASSING.
UPWARD LEFT AND RIGHT STRIPES FOR PASSING ON BOTH SIDES.
DOWNWARD LEFT AND RIGHT STRIPES FOR NO PASSING
3. SEE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS AND THE OREGON SUPPLEMENT 3F-1 BARRICADES
6C-8 BARRICADE DESIGN
6C-9 BARRICADE APPLICATION
4. ALL MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE CURRENT STATE OF OREGON STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.
5. ALL WOOD SHALL BE PRESSURE TREATED.

NOTE: WIDTH OF 32 FEET TO BE USED FOR 32 FT. WIDE STREET ONLY



**STREET BARRICADE
TYPE III**

ENGINEERING
DEPARTMENT
1924 COUNCIL STREET
P.O. BOX 326
FOREST GROVE, OR 97116

DRAWING NO.
308
SCALE
NONE
LAST REV. 7/20/22