


WET CUT JOINT LINE
EVERY 5' SPACE JOINT
TO MATCH DRAIN PIPE
(MIN. 1" DEEP CUT)

INSTALL 3" PARKWAY CULVERT THROUGH
SIDEWALK TO MEET WEEP HOLES IN CURB
INSTALL WEEP HOLES AND CULVERTS AS
DIRECTED BY ENGINEER.


4" OF CONCRETE ON
2" OF 3/4"-0" CRUSHED
AGGREGATE

3' PARKWAY CULVERT
AS DIRECTED BY ENGINEER

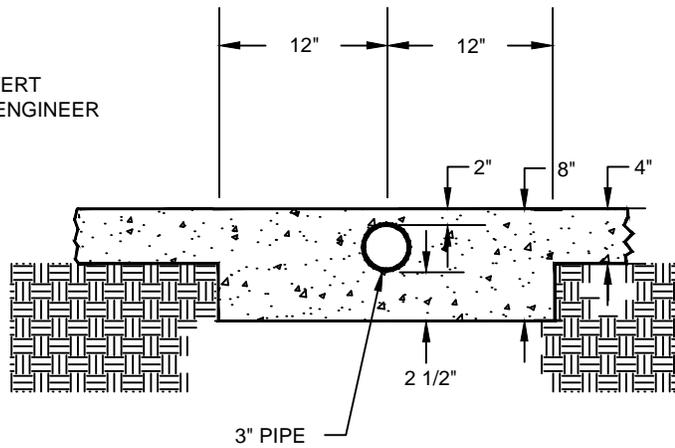

SECTION D-D
N.T.S.

NOTES:
PIPE MATERIAL SHALL FOLLOW CURRENT CLEAN WATER SERVICES STANDARDS
CONCRETE SHALL REACH 3000 PSI AT 28 DAYS

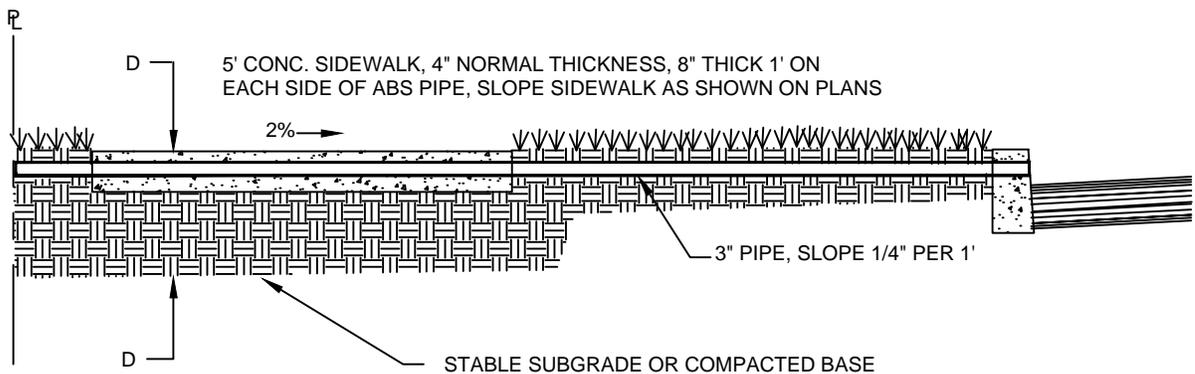

SECTION C-C
N.T.S.