


**MORTARLESS
BRICK PAVER**

5 FOOT SECTION
AT TREE WELL ONLY


6 ROWS OF
BRICKS

5' X 5'
TREE WELL

DEEP
TOOL
JOINT
1/4
OF
THICKNESS
OF
CONCRETE

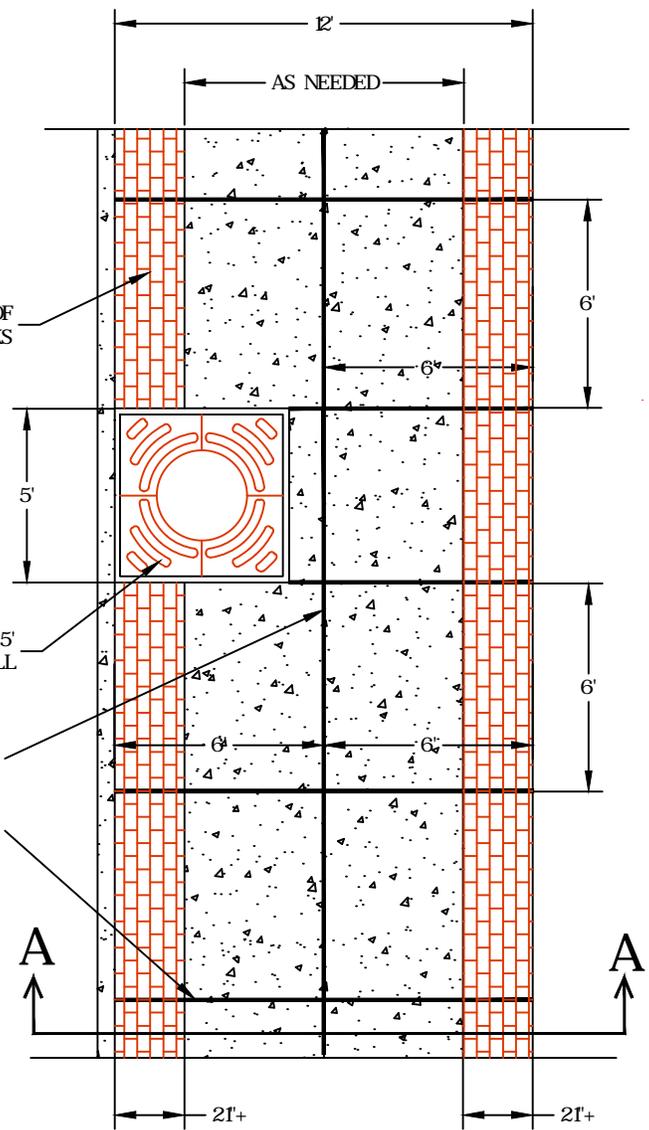


USE SAND BED TO ADJUST
BRICKS FLUSH TO TOP OF CURB
AND SIDEWALK

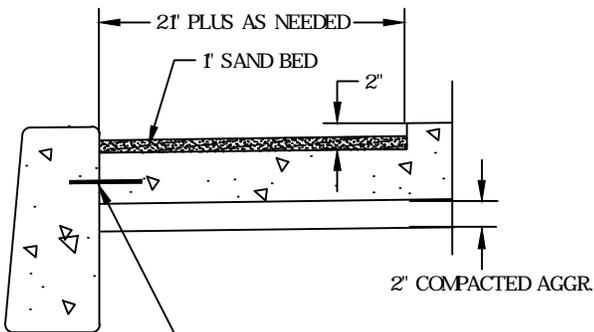

DOWEL SIDEWALK TO CURB
PER STANDARD DETAIL FOR
DOWELING SIDEWALKS

SIDEWALK CROSS SECTION A-A

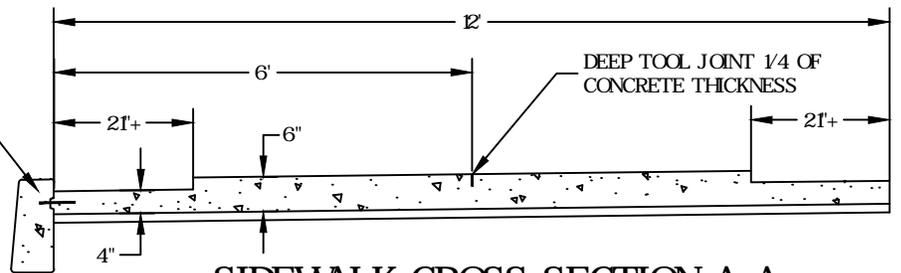

NOTES:

- 1 CONCRETE TO REACH STRENGTH OF 3000 P.S.I. IN 28 DAYS 2" TO 4" SLUMP.
- 2 EXPANSION JOINTS TO BE PLACED AT SIDES OF DRIVEWAY APPROACHES, UTILITY VAULTS & AT SPACING NOT TO EXCEED 90' OR AS DIRECTED BY THE ENGINEER.
- 3 FOR SIDEWALKS ADJACENT TO THE CURB & POURED AT THE SAME TIME AS THE CURB, THE JOINT BETWEEN THEM SHALL BE A TROWELED JOINT WITH A MIN. 1/2" RADIUS.
- 4 DRAIN BLOCKOUTS IN CURBS SHALL BE EXTENDED TO BACK OF SIDEWALK WITH 3" DIA. SCH. 40 ABS OR PVC PIPE AT 2% SLOPE, CONTRACTION JOINT TO BE PLACED OVER PIPE.



**DOWNTOWN
TREE WELL GRATE**

ENGINEERING
DEPARTMENT
1924 COUNCIL STREET
P.O. BOX 326
FOREST GROVE, OR 97116

DRAWING NO.
105

SCALE
NONE

LAST REV. 8/9/22