


NOTES:

1. RAILS TO BE PAINTED RED WITH WHITE STRIPES SHALL BE REFLECTORIZED ON BOTH SIDES, WITH CHEVRONS AS SHOWN. ALL WOOD SHALL BE PAINTED WHITE
*FOR WIDER APPLICATIONS, MULTIPLE SECTIONS AS SHOWN SHALL BE USED.
2. SEE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS AND THE OREGON SUPPLEMENT 3F-1 BARRICADES 6C-8 BARRICADE DESIGN 6C-9 BARRICADE APPLICATION
3. ALL MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE CURRENT STATE OF OREGON STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.
4. ASSEMBLE WITH 5/8" GALV. MACHINE BOLTS, NUTS AND WASHERS.
5. ALL WOOD SHALL BE PRESSURE TREATED.

2X4 TIE BOARDS BOLT TO TOE-PLATES (BOTH PLATES)

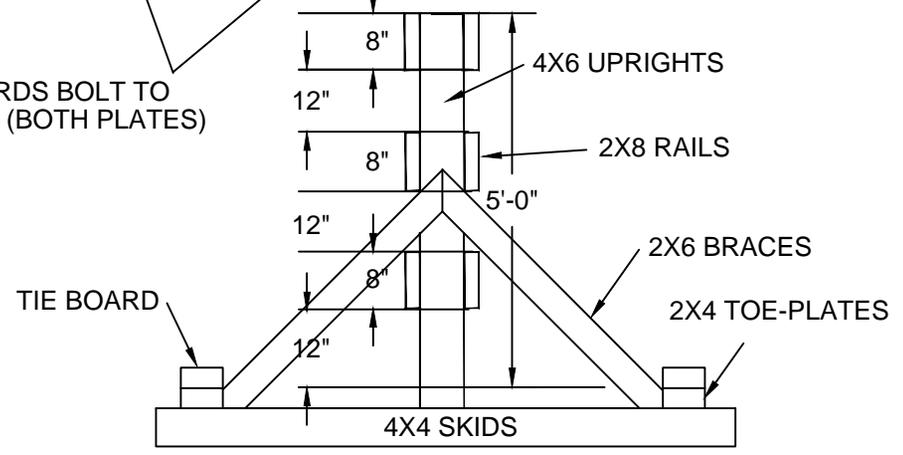

**DOUBLE SIDED
STREET BARRICADE
TYPE III (MODIFIED)**

ENGINEERING
DEPARTMENT
1924 COUNCIL STREET
P.O. BOX 326
FOREST GROVE, OR 97116

DRAWING NO.
303

SCALE
NONE

LAST REV. 7/20/22